

SOC 630-1 och -2

Beröringssäker anslutning för
PEX/EPR-isolerad kabel 12-24 kV
1-ledare 50-300 mm².

Screen-protected connectors for
XLPE-insulated cable 12-24 kV
1-core 50-300 mm².

ABB


4290.4099-14




1776

March 2008

1.

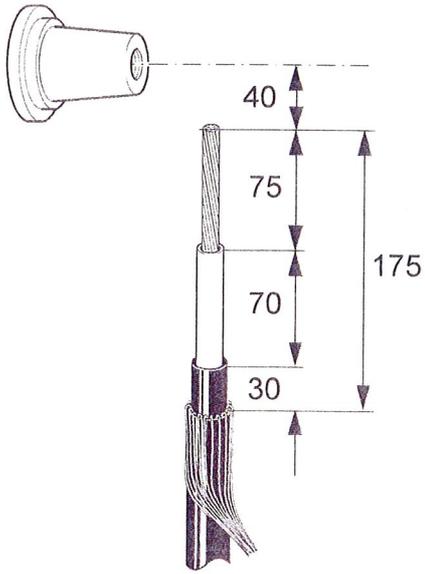


2.

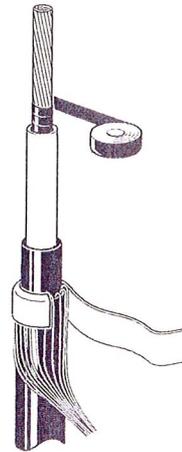


1777
1596
6791

3.

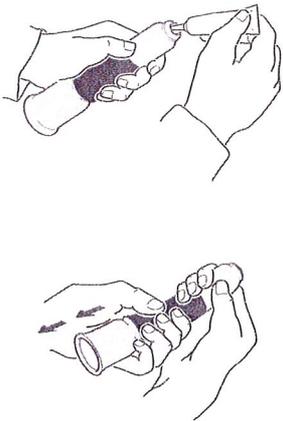


4.

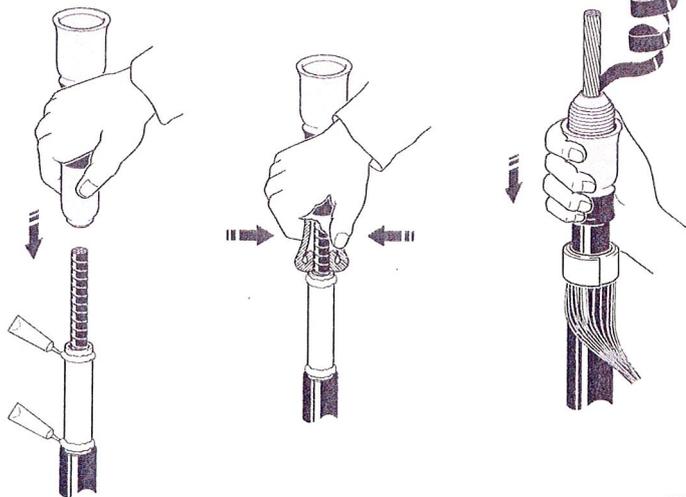


6792
6793

5.

For cables > 185 mm²

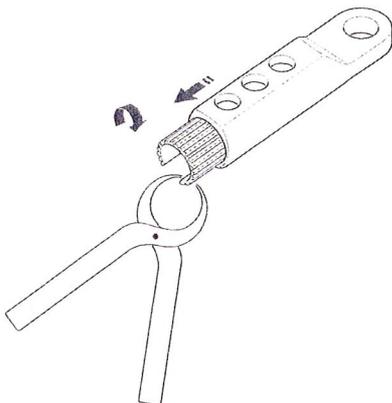


6.

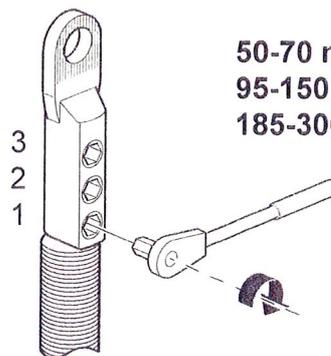


50-70 mm² 15 Nm
95-150 mm² 25 Nm
185-300 mm² 30 Nm

6775
1600

7.

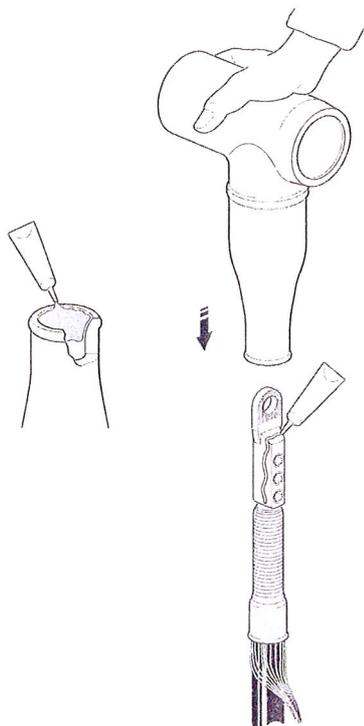


8.

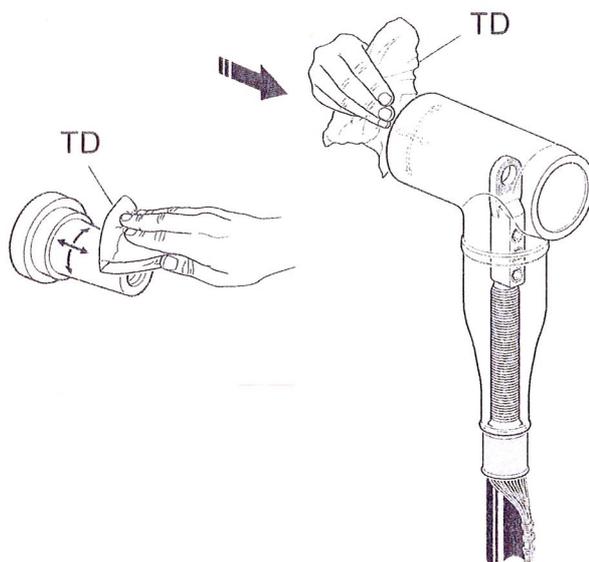


1601
6769
6770

9.

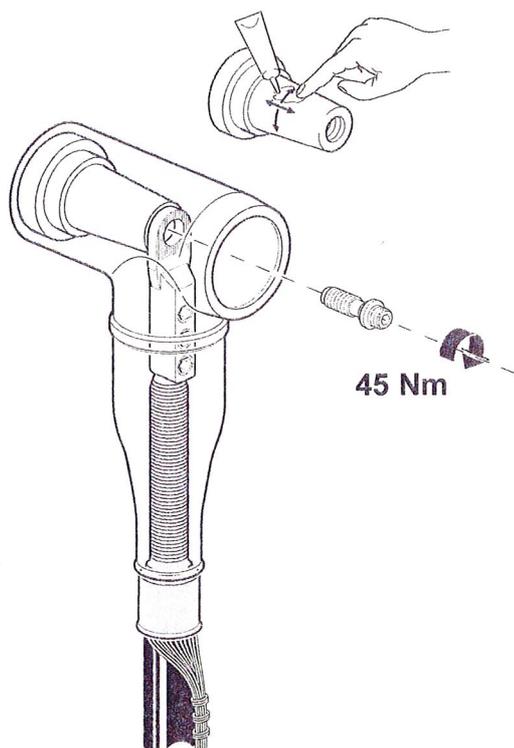


10.

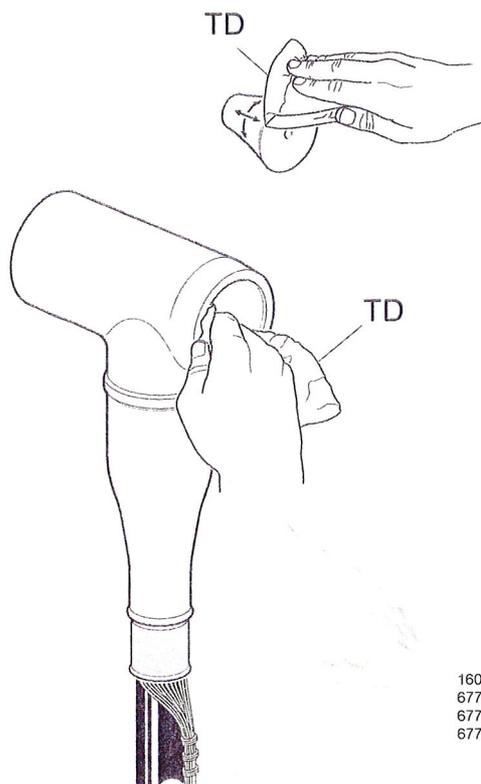


1602
6774
6771
6772

11.

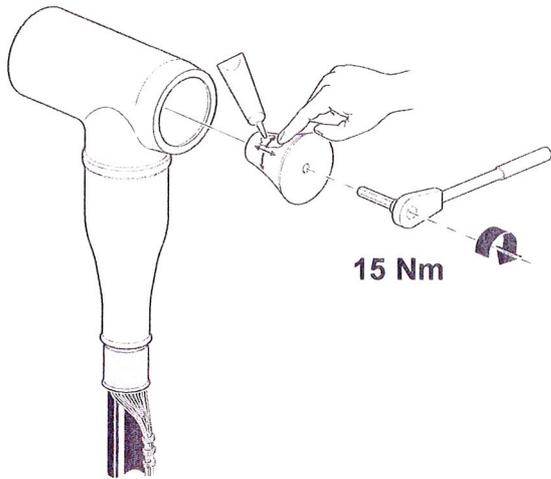


12.

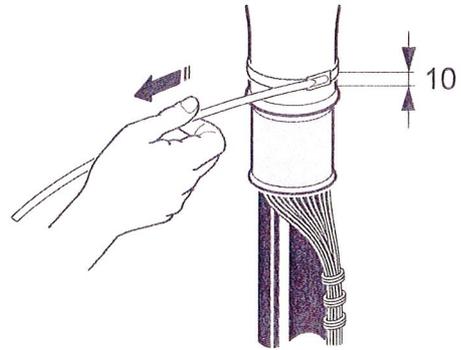


1603
6773

13.

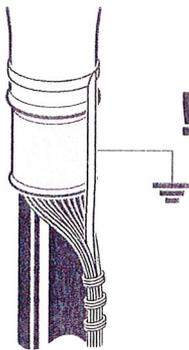

14.

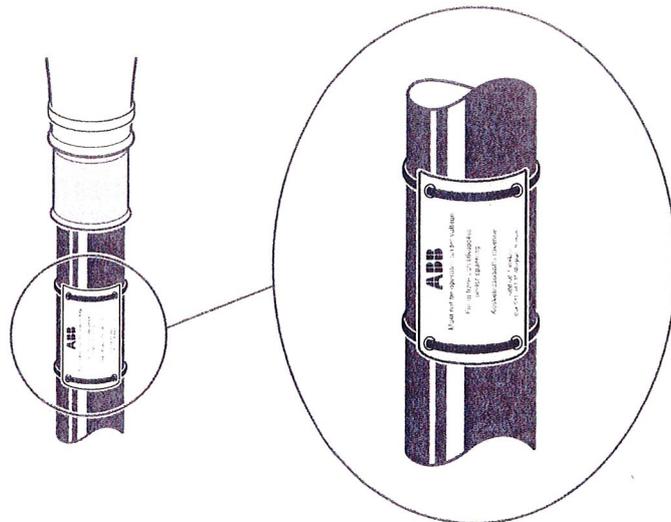

1642
13204
13205